







## 2 Access doors

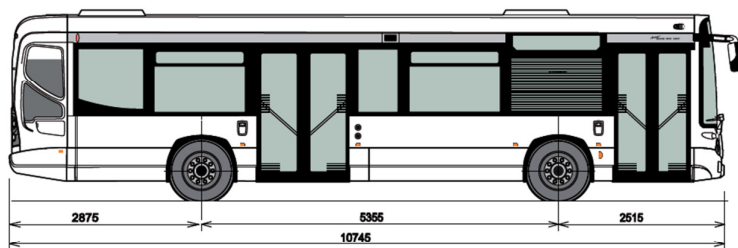

## 3 Access doors

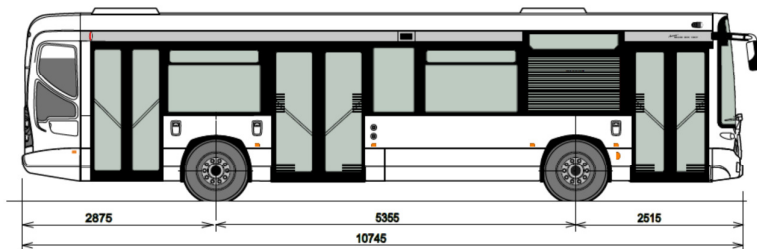

Version for France  
 Technical data sheet  
 July 2014

### WEIGHTS


Gross kerb weight	according to equipments
G.V.W. max permitted weight	17 400 kg
on front axle	7 245 kg
on rear axle	10 400 kg

### DIMENSIONS


Overall length	10.745 m	
Front overhang	2.515 m	
Wheelbase	5.355 m	
Overall width	2.330 m	
Total height, full load	2 885 m	
Inside headroom	2.370 m	
1 <sup>st</sup> step-height		
	front door	0.320 m
	centre & rear door	0.330/0.340 m
Width of front / centre / rear doors		1000 / 1200 / 0.850 mm
Floor height		0.340 m
Ground clearance, under skirt		0.300 m
Front/rear tracking		1.950 m/1.796 m
Inner Turning radius		8.085 m
Outer Turning radius		9.690 m
Angle of attack / escape		8°/8°

# GX 137L


2 Access doors

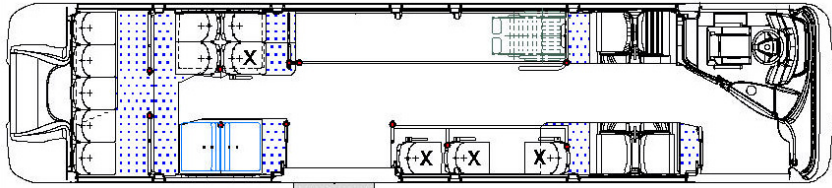


3 Access doors

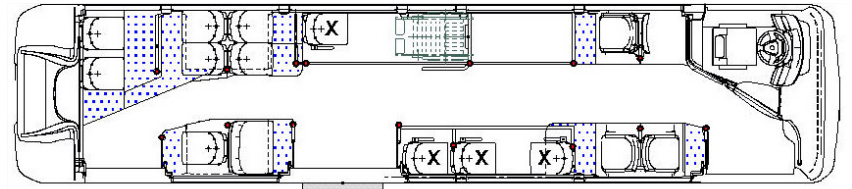


17 seats + driver + "wheelchair" space

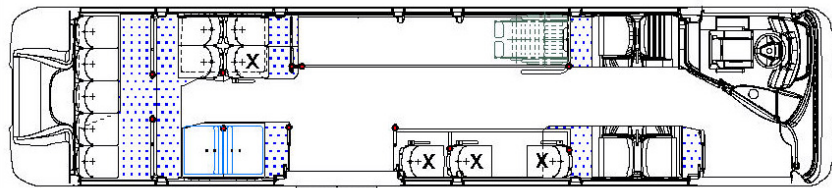


15 seats + driver + "wheelchair" space

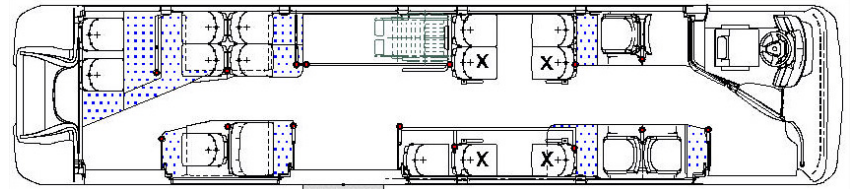

29 seats + driver + "wheelchair" space

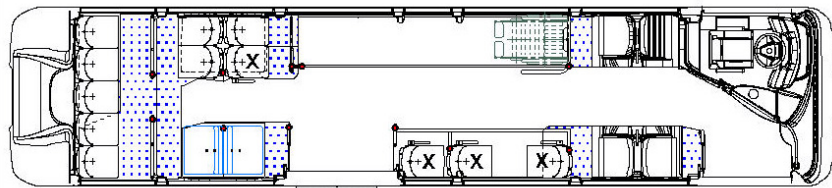

18 seats + driver + "wheelchair" space

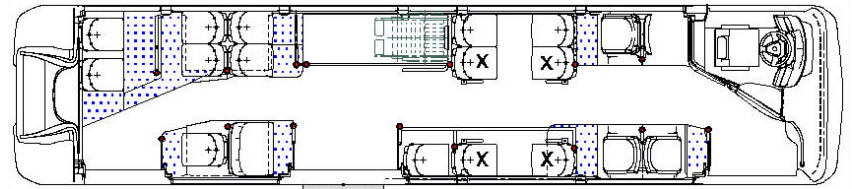

**For alternative layouts, please contact us**

## CHASSIS AND STRUCTURE

Self-supporting integral structure. Anti-corrosion treatment of chassis by cathophoretic immersion. Body structure consisting in 5 panels (front/rear/left/right/top) made of welded stainless steel sections and sheet panels. Assembling of the 5 panels to the chassis by bolting. 12mm thick plywood floor, protected by phenolic resins on both sides and wax containing resins on ground side.

### OPTIONS :

. Fire detector in engine compartment.	. Fire detector and extinguisher in engine compartment.
--	---

## PAINT & DECORATION

Exterior paint : polyurethane lacquer finish (white, RAL 9010), without customising.

### OPTIONS :

. Custom finish.	. Lettering and adhesives.
------------------	----------------------------

## EXTERIOR EQUIPMENT

Left and right rear-view mirrors. Integrated flag holders. Wheel nut guards on front wheels.

### OPTIONS :

. Self de-frosting rear-view mirrors . Left side and rear advertising frames . Fender skirt	. Motor driven and self de-frosting rear-view mirrors controlled from driving position . Front and rear wheel caps
---	---

## EXTERIOR TRIM

Composite front and rear ends, roof and side panels. Bonded assembly. Gravel resistant protected wheel arches. Composite front and rear bumpers in 3 parts at front end and at rear end.

## GLAZING

TSA tinted Panoramic laminated glass windscreen bonded on front face. Tinted rear window. Bonded side windows : right-hand side : 4 fixed single-panel windows and 1 tilting window / left-hand side : 4 fixed single panel windows, 2 tilting window. Driver's window : sliding type in front part. TSA tinted glass all round.

### OPTIONS :

. Sliding type side windows. . 3 lower windows on platform. . Heat-reflecting side windows. . Glazed roof : Lumi'Bus ®	. Heat-reflecting windscreen. . Left-hand side :3 tilting and 3 fixed side windows.
---	--

## ACCESS AND DOORS

2 inward swing doors. 2-leaf doors are air-driven. Both leaves of front door are double glazed. Brakes applied by opening of the central door. Manual access ramp on the central door. Buzzer on doors.

### OPTIONS :

. 3rd inward swing door.  . Safety by photo-cells on doors. . Passenger counting system on LCD screen.	. Brakes applied by opening of the front door. . Self service.  . Electrical access ramp . . Center sliding doors..
---	---

## INTERIOR TRIM

High wear resistant floor covering up to plinths top. Laminated roof and side panels. Thermo-formed wheel arches. Polyester ceiling arches.

## DRIVER'S COMPARTMENT

Adjustable steering wheel (height and angle). Air-suspended driver's seat with adjustment control on right-hand side. VDV instrument panel with warning lamps and control display panel. Pivoting door, wall behind the driver with a glazed upper part. Interior rear-view mirrors. Left side and front sun visor. Driver's individual light, luggage box. Average fuel consumption on dashboard.

## INTERIOR FINISHES

Front destination indicator with full opening door. TSA tinted glazed partitions on doors. 4 loudspeakers. 5 « emergency exit » hammers. Fire extinguisher location close to the driving position. 5 « stop requested » push buttons with acoustic warning. « wheelchair » space with padding and sensitive « stop requested » push button with acoustic warning.

### OPTIONS :

. Padding on platform. . Additional « stop requested » switches. . Video surveillance.	. Fire extinguisher. . Interior information frames. . First-aid box (empty). . Driver loudspeaker.
--	---

## HEATING - COOLING

Front heating/de-frosting unit used for driver's compartment (air from outside or re-circulated air). 4-speed control (power : 17 500 W). 1-off passenger heater (forced air, 7500 W) with 2 speeds controlled from the dashboard. Insulated roof.

### OPTIONS :

. Motor driven opaque roof hatches . Hand actuated opaque roof hatches . Passenger and driver's compartment air conditioning	. Additional heater in passenger compartment  . Autonomous pre-heater . Heat-reflecting glazed roof hatches, motor-driven
--	--

## SEATS LAYOUTS

4 seats dedicated to people with reduced mobility. Epoxy stanchions and handrails. Grey epoxy-painted seat legs.

### OPTIONS :

. Multi-branch stanchion on central platform. . Stainless steel stanchions and handrails.	. For passenger seats options (anti-vandalism upholstered, or other seat models etc) please contact us.
--	---

## DESTINATION AND INFORMATION EQUIPMENT

Preparation for front or lateral electronic destination indicator. 1-off illuminated « stop requested » sign box at the front. Preparation for illuminated strip display behind the driver. Preparation for acoustic and visual information.

### OPTIONS :

. Line stops map (single or double sided) near the ceiling.  . Lateral destination indicator flush mounted with side window top.	. Additional illuminated « stop requested » sign boxes. . Front destination indicator. . Line number display at rear window. . Acoustic and visual information of destination.
--	---

## ELECTRICAL EQUIPMENT

24 V nominal voltage. 2-off 12 V 185 A/h maintenance-free batteries mounted on a sliding support located in an outside compartment at the vehicle front left-hand side . Battery re-loading and engine start FENWICK socket. 2-off 150 A alternators. Thermal circuit-breakers. Front lights : parking lights, dipped headlights, driving lights hinge fitted and turning lights. Rear lights : parking lights, stop lights, fog lights, reverse lights and turning lights. 3-speed electrical windscreen wipers with intermittent speed controller. Electrical windscreen washer with wiper mounted nozzles. Passenger compartment lighted by fluorescent overhead lights (staggered lighting possible). Door step lighting at door opening. Lighting of driver's compartment, paying position and steps. Engine compartment lighting. Electricity-saving system for intensive use whilst engine is off. Electrical cabinet located in the lower section of the wall behind the driver's seat. Diagnosis system on board (1<sup>st</sup> level).

### OPTIONS :

. Front fog lights . 3 <sup>rd</sup> stop light . Flashing/stop indicators on the top of rear end. . Atmosphere lightings with leds blue.	. Complete radio equipment  . Monoring gong for pedestrian zone . Day time running lights.
--	---

## DRIVE LINE ENGINE

Engine position ..... rear left, longitudinal  
 Mark ..... FPT  
 Type ..... Tector 7  
 Cycle ..... 4-stroke, diesel  
 Bore ..... 104 mm  
 Stroke ..... 132 mm  
 Number of cylinders ..... 6  
 Cylinders lay-out ..... upright, in line  
 Cubic capacity ..... 6.7 cc  
 Compression volumetric ratio ..... 17/1  
 Overfeed ..... exhaust turbocharger  
 with intercooler  
 Cooling system ..... liquid circuit with thermostat, radiator  
 hydraulic-driven cooling fan, steel pipes  
 and silicon flexibles.  
 Air filter ..... dry  
 Fuel (common rail) ..... diesel  
 Lubrication ..... oil circulation under  
 pressure  
 single cartridge oil  
 filter  
 Max. output (2 doors) ..... 184 kW (250 HPDIN)  
 at 2 500 rpm  
 Max. torque ..... 950 Nm at  
 1 400 rpm  
 Fiscal power ..... 18 HP  
 Sound proofing ..... noise shield and  
 encapsulation  
 of engine  
 compartment  
 Emergency stop / sound alarm ..... engine running  
 Air + gearbox  
 +engine water/oil  
 +alternator failure  
 +probe on cooling liquid  
 Tank  
 Exhaust pipe ..... in low position  
 Diesel pre-heater

**OPTIONS :**

- . Exhaust pipe in high position.
- . Engine 210 kW (286 ch)

**GEARBOX**

ZF or VOITH automatic gearbox :

	Rear	1st	2nd	3rd	4th	5 <sup>th</sup>	6th
ZF Ecolife 6 AP 1200	4.23	3.36	1.91	1.42	1	0.72	0.61
VOITH Diwa D854.6	4.7	5.9	1.43	1	0.7		

**FRONT AXLE**

Front independant wheels.

**REAR AXLE**

ZF AV 132-87 ° double-reduction axle. Reducers ratio in hubs : 1/3,2.  
 Axle torque : 6.21 (19 x37).

**SUSPENSION**

Constant height air suspension. 2 air bellows at the front, 4 air bellows at the rear. Constant floor height controlled by electrical levelling valves. Suspension high-position for driving over obstacles. Kneeling and raising system (60 mm stroke) on vehicle right-hand side, controlled from the driving position.

**STEERING**

Hydraulic power assisted steering. ZF 8098 steering box.

**COMPRESSED AIR**

Pressure : 12 bars. 630 cm3 twin-cylinder air compressor with a 760 l/mn flow rate. Driven by sprockets and cooled by the engine circuit. Polyamide and stainless steel piping, quick fittings. Singletower air dryer. Manual bleeding on the air tanks. Cyclone air cleaner.

**OPTIONS :**

- . Manual bleeding, offset

**BRAKES**

Service brakes : air-controlled disc brakes at the front and at the rear. Gear box built-in hydraulic retarder coupled to the service brakes. Pneumatic parking brake actuated by lack of air, spring chamber on rear wheels. Door brake : manually controlled temporary stop operating on the rear braking circuit. Parking brake and door brake controlled via separate circuits. Emergency braking operated by parking brake. ABS-ASR braking system. EBS braking system.

**FUEL TANK**

Capacity : 230 litres + 54 litres of AdBlue additive. Tank filling spouts on vehicle rear right hand side. Fuel filling speed, without discharge, of about 80 l/mn.

**WHEELS AND TYRES**

275/70 R 22.5 tyres at the front and 455/45 R 22.5 tyres at the rear.

**OPTIONS :**

- |  |   |
|--|---|
| . Rear towing eye bolts.<br>. Lose spare wheel or rim. | . Standard vehicle accessories kit.<br>. 455/45 R 22.5 tyres at the rear. |
|--|---|

**PERFORMANCES**

Maximum speed : 85 km/h .